


Data Types \ String \ Variable

Set


With this string variable node a user can set a string variable by Value or Expression.

Set String Variable

Using this node a string variable is set by value, as shown in the example below. The **Greeting** variable is set using string input node with "**Good day sir!**"

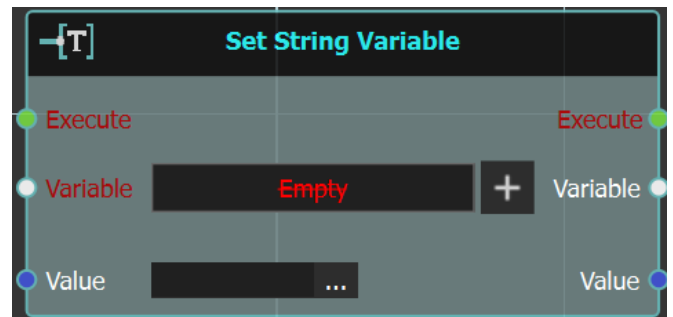

Example

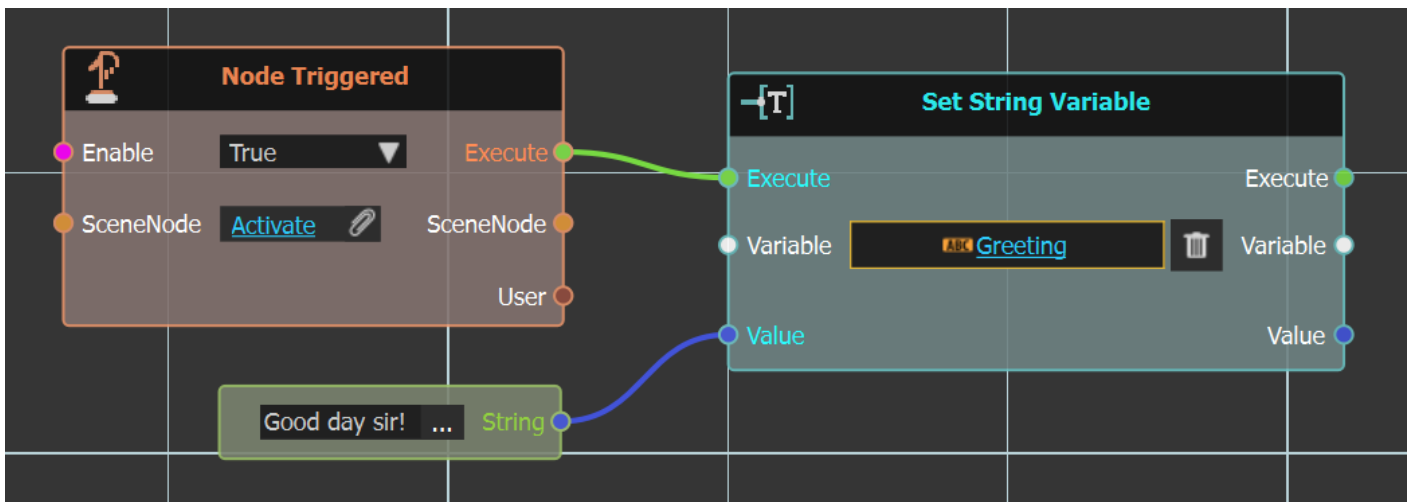


$f(T)$ Set String Variable By Expression


Using this node a string variable is set by expression, as shown in the example below. The **Name** variable is set using an expression input node with `string.lower()` expression.



Example

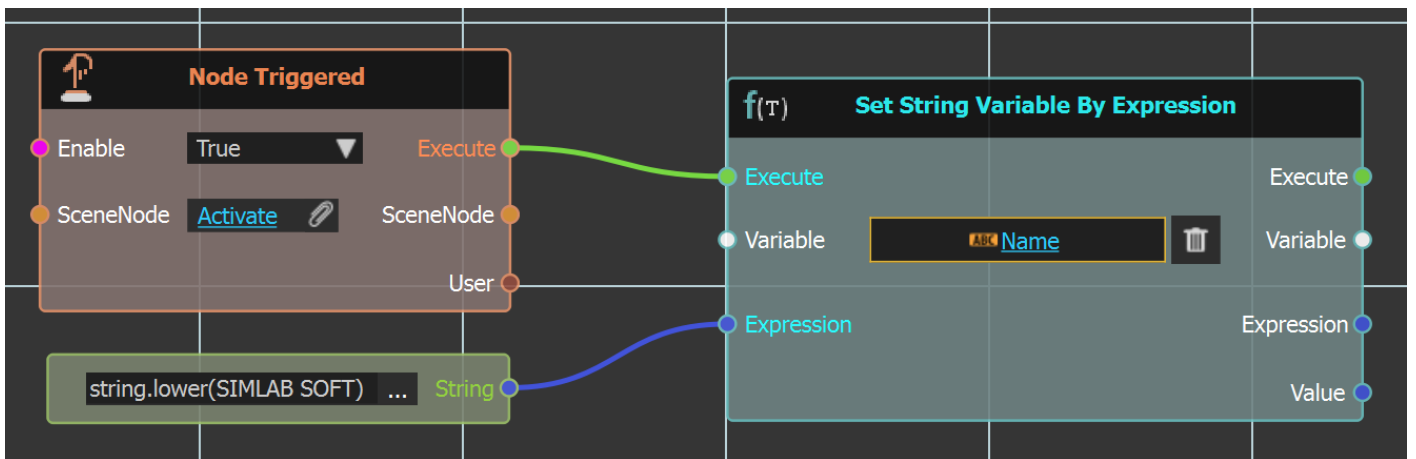


Get

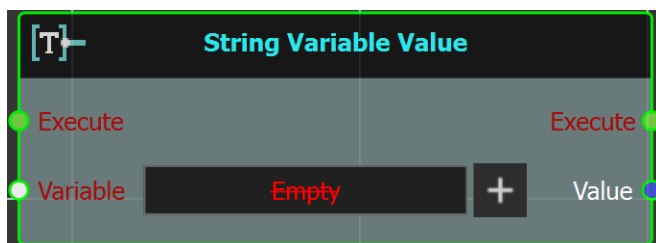

This node is used to get a string variable

value. As shown in the example below, the string variable **Greeting** is gotten as input to this node.

Example

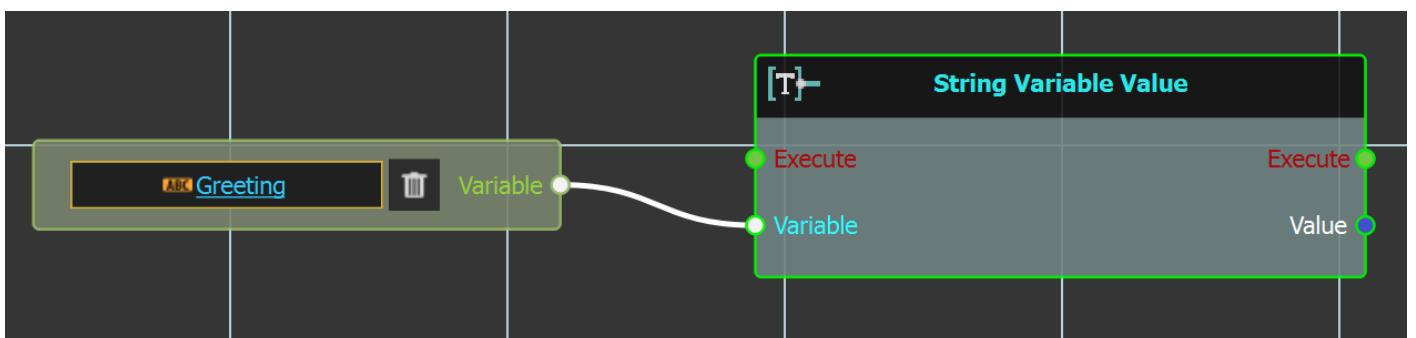

Revision #16

Created 15 August 2024 06:56:49 by Khalid Abu Eid

Updated 25 October 2026 09:00:55 by Rafat